


ABS & PVC Inclinator casings

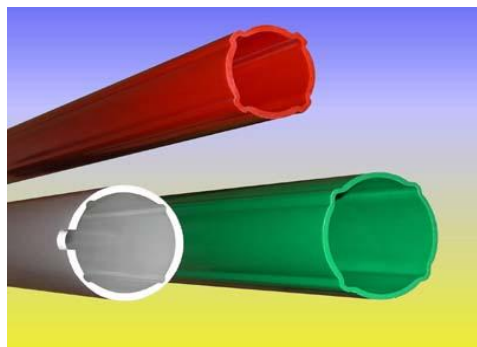

The ABS and PVC inclinometer casings are specially designed for driving the slope indicator into the soil. This device allows to monitor all sliding movements of dams, embankments and all retaining structures.

| [mm] Diametro nominale Nominal diameter Diamètre nominale Diámetro nominal Номинальный диаметр | A [mm] Diametro interno Internal diameter Diamètre interne Diámetro Interno Внутренний диаметр | B [mm] Diametro esterno External diameter Diamètre externe Диámetro externo Внешний диаметр | C [mm] Diametro guide Grooves Diameter Diamètre Guides Диámetro Guis Диаметр направляющих | Materiale Material Matériel Material Материал | |
|---|--|---|---|---|---|
| 2" | 47 | 60 | 54 | ABS |  |
| 3" | 74 | 87 | 80 | ABS | |
| 60/70 | 60 | 70 | 64 | ABS |  |
| 45/55 | 45 | 55 | 48 | PVC | |
| 57/70 | 57 | 70 | 61 | PVC | |
| 60/70 | 60 | 70 | 64 | PVC | |

ACCESSORIES:

- Safety sumps
- Caps
- Magnetic rings (available only for o.d. 70mm)
- Brass rings (available only for o.d. 70mm)
- Telescopic coupling
- Oval injection low pressure pipe 8/13mm
- PVC Tape
- Rivets
- Durvicol